




### C. TYPICAL DESIGN LAYOUT

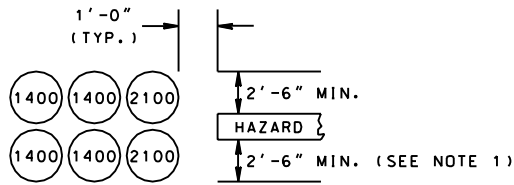


DESIGN SPEED = 25 M.P.H.

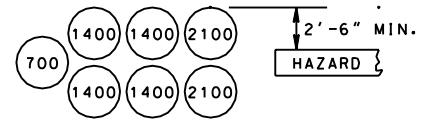


DESIGN SPEED = 30 M.P.H.

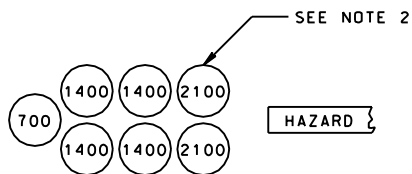


DESIGN SPEED = 35 M.P.H.

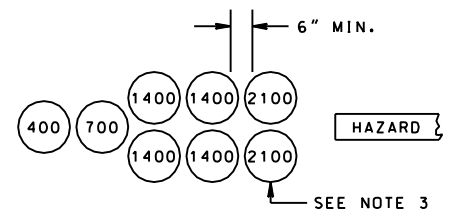


DESIGN SPEED = 40 M.P.H.

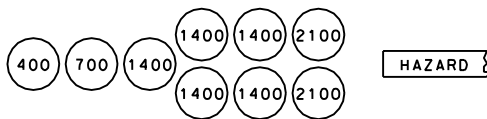

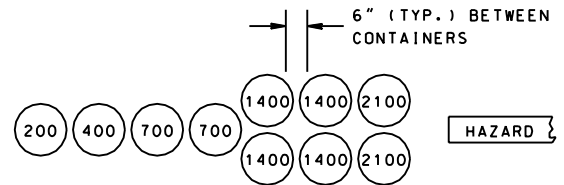

DESIGN SPEED = 45 M.P.H.

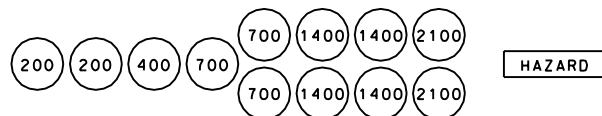

DESIGN SPEED = 50 M.P.H.



DESIGN SPEED = 55 M.P.H.

SPECIFICATION 104 & 606		CATEGORY CODE ITEMS	<div>Maryland Department of Transportation STATE HIGHWAY ADMINISTRATION STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES CRASH CUSHION SAND FILLED PLASTIC BARRELS (TEMPORARY OR PERMANENT)</div>	
APPROVED		<div> DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT</div>		
	APPROVAL • SHA REVISIONS		APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	
	APPROVAL 8-12-02		APPROVAL 9-4-02	
	REVISED		REVISED	
	REVISED		REVISED	
		REVISED		
			STANDARD NO. MD 106.01	